

Introduction

The H1-Rail router is the multi-service communications platform for railway environments. It provides reliable 4G/LTE and Wi-Fi broadband communications with redundancy, aggregation and advanced network security mechanisms options.

Hardware design according to railway regulations for installations on lightweight trains, trams or high speed trains, with protection against vibrations and emissions according to EN 50155, extended temperature range.

It also communications with dynamic configurations extremely reliable (through to positioning and communications quality).

Product Highlights

- ▶ Multi-service communications platform
- ▶ Multiple simultaneous WAN (aggregation & balance)
- ▶ According to railway regulations
- ▶ Geo-fencing: GPS-based dynamic configuration
- ▶ Isolation of standard-based services
- ▶ Integrated switch for connection to other systems
- ▶ Complete WiFi package (Management, Hot Spot & APs)

Interfaces

H1-Rail

Up to 2 x 4G/LTE Module	Yes (Depends on the model)
1 x Wi-Fi 802.11n (Client and AP)	Yes (Optional)
4 x Fast-Ethernet 10/100 Mbps (M-12)	Yes
Asynchronous Serial Port (RS-232)(DB-9)	Yes
Embedded GPS (NMEA)(FME connector)	Yes (Optional)
110Vdc power (M-12 connector)	Yes
2 Type-N LTE connectors (MIMO)	Yes
2 Type-N Wi-Fi connectors (MIMO)	Yes

Competitive Advantage

Simultaneous use of several WWAN interfa	Multiple LTE and/or Wi-Fi access links. Simultaneous use, adding capacities, balancing loads or ensuring high application availability and continuity
Rugged railway hardware design	It supports extreme vibration and temperature conditions (-25 to 70° C). It complies with railway regulations (EN 50155, EN 50121-3-2, EN 301 511, EN 301 908-1)
GPS and service-based automatism	Communication monitoring (availability and quality) and positioning for dynamic application of routing policies for each service, link and position.
Corporate networking software	It embarks the latest IP network technologies available in the vehicle, providing secure, quality and user-friendly multi-service mass deployment.

Scenarios

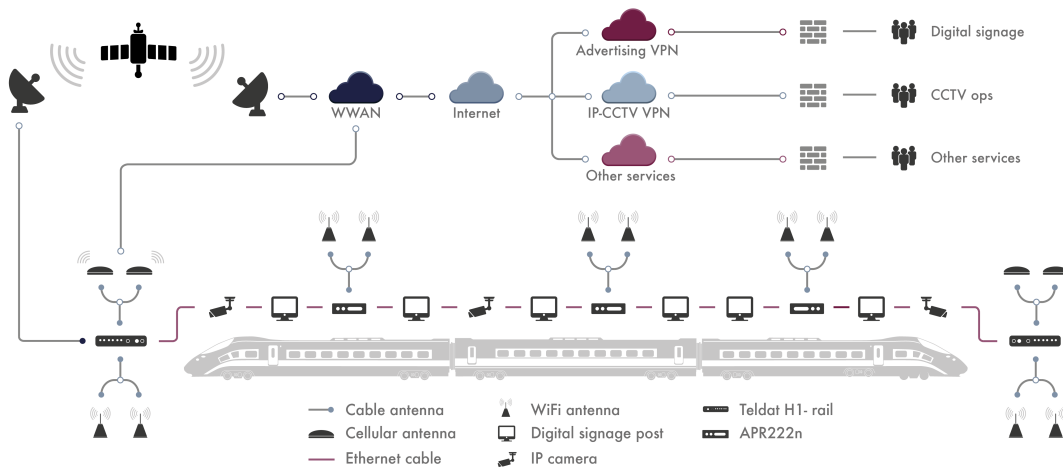


Figure: Linked train: New railway transport paradigm

Key Features

Broadband with simultaneous LTE connections Up to 2 WWAN modules (4G/LTE) can be installed. For separate operation or backup. One of the modules also supports Dual-SIM for operator redundancy.

4G/LTE dual-SIM for operator redundancy The double SIM facility with a single module for use by two telecommunications operators, using one as backup for the other using a single module.

Wi-Fi (802.11n) for travellers (AP) or depots (Client) 802.11n Wi-Fi module enables Wi-Fi services to be supplied to passengers during the journey (with multiple SSIDs and integration with HotSpot platforms) and act in client mode for connection to external Wi-Fi networks.

Railway hardware design Designed to support extreme vibration and temperature conditions (-25 to 70° C). It complies with railway regulations (EN 50155, EN 50121-3-2, EN 301 511, EN 301 908-1)

Embeddable on management platforms Easy integration in third party standard-based management tools SNMP) It is also integrated in the Teldat Colibri NetManager management platform for remote monitoring and management.

Aggregation/balance for application continuity Simultaneous use of WAN interfaces (LTE, Wi-Fi, Satellite, etc.) to share and/or aggregate the load from different services using different interfaces, optimising coverage areas and total performance solutions.

Isolated and secure multi-service communications The use of advanced products such as VRF, VLANs, QoS and Policy Routing together with multiple WAN links enables logical separation of each service and management of different solutions sharing the communications.

Embedded GPS (NMEA) easily integrated with 3d parties Ideal for fleet management or telemarketing applications. The equipment comes with a GPS that can be accessed through a TCP port that supplies information on real time geo-positioning using NMEA data.

Dynamic performance based on positioning (GPS) Dynamic configuration according to the GPS position and use of Wi-Fi as an AP or client for data synchronisation at depots or use of a SIM or other card to optimise coverage and data consumed.

Advanced troubleshooting (fine adjustment in the cloud) Advanced troubleshooting such as sniffer and syslog to analyse problems according to service, position and coverage along the route. Cloud management with self-provisioning allows installation by non-qualified personnel.

HARDWARE TECHNICAL FEATURES

Up to 2 simultaneous WWAN Interfaces (LTE/HSPA+/HSPA/EDGE)

Up to 2 integrated hardware modules with HSPA+or LTE/HSPA + technology

2 external antennas with a Type-N connector per module

LTE/DC-HSPA+/HSPA+/HSPA/UMTS/EDGE/GPRS;

LTE/EVDO/1xRTT (Inquire for others)

Wi-Fi interface (802.11abgn)

Access Point and client mode 802.11abgn selectable 2.4/5GHz

MIMO 2x2 with external antennas (Type-N connector) per module

WEP, WPA, WPA2 security. WMM QoS service quality Multi SSID

Dimensions and Weight

Length x Width x Height: 240 x 483 x 45 mm (1U on a rack)

Approximate weight: 3.3 Kg

Flexible installation: On a rack and horizontal

Ethernet interfaces

10/100BaseT Fast Ethernet switch with 4 ports (4-pole M-12 connector)

LEDs per port for installation troubleshooting

Duplex support, speed link auto-negotiation IEEE 802.3u, VLAN y 802.1X

GPS interface

GPS antenna activates FME and NMEA protocol

48 channels, high sensitivity and WAA support

Supply of local and remote information

Environmental specifications

Temperature: -25 to 70 ° C

Relative humidity: 5 to 95%

Shock and vibration-proof (EN 60068-2)

SOFTWARE TECHNICAL FEATURES

Specific Wi-Fi functions

HotSpot Gateway function for HotSpot service support

WLAN controller function for Teldat embarked APs

Dynamic function (AP or client) according to position

IP protocol (2)

Multicast: IGMP (v1,v2, v3), PIM-SM, MSDP, MLD, MLDv2

IPSLA service probes (delay, package loss, jitter)

High availability: VRRP, TVRP (HSRP compatible)

security (2)

Certificates: CSR, SCEP, X.509v3, PKIX, LDAP revocation

Static and dynamic access lists and session-based Firewall

Detection of DoS and DDoS attacks

Service quality

Classification, marking, BW management, BW prioritisation and limitation

Up to 32 types 16 queues per interface

Strict policies (PQ), Low latency (LLQ), according weight/type (WFQ, CBWFQ)

Management

CLI configuration and storage in a plain text file

Assignment of user and group licenses

RADIUS and TACACS+ AAA support

IP protocol

ARP, ARP Proxy, MTU discovery, NAT, ECMP, BFD

RIP, OSPF, BGP, Policy based static and dynamic routing

Virtual Router Forwarding (Multi-VRF)

security

IPSec support in transport mode, tunnel and DMVPNs

Pre-shared authentication, RSA, Certificates, MDS, SHA-1

Encrypted: DES (56 bits), 3DES (168 bits), AES (128, 192 and 256 bits)

IP services

DHCP, DNS, FTP, SFTP, SSH, Telnet server and client

NTP, LDAP, Syslog, SCP client. TFTP server

DHCP, dynDNS relay

Specific WWAN functions

Automatic hand-over (passive and active probe-based detection)

Advanced link monitoring (package, latency, jitter error)

Double SIM and double module associated with the hand-over mechanism

Management (2)

Netflow, RMON V5 and V9, SNMPv1, v2c y v3, Syslog support

Manageable via SMS

Remote Wireshark compatible traffic collection

ADDITIONAL TECHNICAL FEATURES

Traffic balance and broad band aggregation

IPSec-based Smart Balancing aggregation mechanism

Use of DMVPNs and dynamic routing for application continuity

Multipath per session (TCP/IP)

Railway environment ruggedness and power supply protection

Certifications: EN 50155, EN 50121-3-2, EN 301 511, EN 301 908-1

20 W consumption, screw-on connectors (M-12, Type-N and FME)

110 Vdc power supply (see possibility of obtaining other voltages)

Advanced GPS functions

Activation of routes and links according to position

Interface management (such as Wi-Fi as client/AP) according to zones

GPS geo-fencing for dynamic performance according to position

DB-9 connector with proprietary pinouts (including adapter)

Type RS232, N81

Default speed 9600 bps, maximum speed 115200 bps

FLEXIBLE COMMUNICATIONS SOLUTIONS THAT GROW WITH YOU.

H1-Rail onboard router for Trains

LTE and Wi-Fi railway communications platform



Teldat is a leading provider in Enterprise Communications equipment and Services for the top corporate to mid-sized and SME markets.

About TELDAT



ROUTERS | Wi-Fi | MANAGEMENT | TRANSPORT | SMART GRID | INDUSTRIAL | VoIP | CLOUD | SECURITY | NFV |

Teldat Group is a leading technology holding that designs, manufactures and distributes advanced Internetworking platforms for corporate environments, providing new and cutting-edge communication solutions without ever losing sight of its customers real requirements. Teldat's solutions development is based on proprietary technology, which is in the Group's DNA. This allows Teldat to be a leading provider in Enterprise Communications equipment and Services for the top corporate to mid-sized markets, as well as the SME and SoHo markets.

From a geographical viewpoint, Teldat Group has a presence in all continents, with its corporate headquarters located in Spain, and operational affiliates in Europe (Germany, Austria, Portugal, Italy and France) and in LATAM (Mexico and Brazil), as well as two business development offices in USA and China.



SARTELCO® SISTEMI SRL

Via Torri Bianche, 1
20871 Vimercate (MB)

Tel. +39- 039- 62905.1 Fax. +39- 039- 62905.99
e-mail sistemi@sartelco.it Web www.sartelco.it

Germany
bintec elmeg GmbH Suedwestpark
94. 90449 Nuremberg (Germany)
Phone: +49 911 9673 0 info@bintec-elmeg.com

France
6 Avenue Neil Armstrong Immeuble
le Lindbergh 33692 MERIGNAC
Cedex (France) Phone: +33(0)
57356300

USA
Silicon Valley Offices 718 University
Ave, Suite 210 Los Gatos, CA 95032
(USA) Phone: +1 408 892 9363

Italy
Viale Edison 637. 20099 Sesto San
Giovanni (MI) (Italy) Phone:
+39(02)24416624

Mexico
Diagonal 27. Colonia del Valle,
Mexico D.F. 03100 (Mexico). Phone:
+52(55)55232213

Portugal
Rua Açucar, 78 1950-009 Lisboa,
(Portugal) Phone: +351 21 862 20
40

Brazil
Rua Mocaci 395 Office 123, Moema,
CIEP 04083-000- São Paulo - SP,
(Brazil) Phone: +55 11 9 9480 8522

China
(A060), F10 SOHO Nexus Centre
No19A, East 3rd Ring North Road,
Chaoyang District, Beijing 100020
(China). Phone: +86 10 57351071

Spain
Head Office: Teldat S.A. Parque
Tecnológico de Madrid 28760
Tres Cantos, Madrid (Spain)
Phone: +34 91 807 6565
D'Anna Piferrer 1-3 08023
Barcelona (Spain) Phone: +34
93 253 0222 info@teldat.com
www.teldat.com

