


VPN GATEWAY

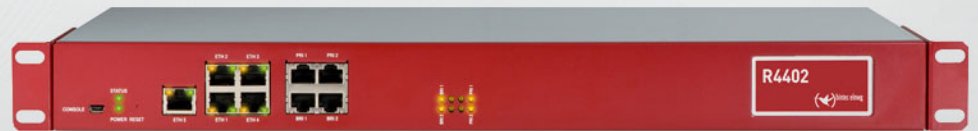

The VPN gateway with PRI interface

bintec R4402

- ISDN - 2 x PRI and 2 x BRI
- 5 x Gigabit Ethernet
- 19 inch housing with integrated power supply
- Web-based configuration / wizards
- IPSec - 10 tunnels, opt. up to 110, HW acceleration
- IPv6
- Stateful Inspection Firewall



bintec R4402

The VPN gateway with PRI interface

The R4402 ISDN VPN gateway is used in companies that require advanced ISDN functionality. Up to 68 ISDN channels are available for various ISDN applications such as ISDN remote access servers, ISDN backup, and ISDN leased lines.

The bintec R4402 is a powerful and, thanks to its comprehensive equipment, flexible VPN gateway. With its 19-inch metal housing and highly efficient internal switched-mode power supply the gateway guarantees long-term reliability in critical corporate applications. This makes the R4402 ideal for use as a VPN gateway in SMEs and company head offices. The device has five Gigabit Ethernet ports, which can be configured for LAN, WAN or DMZ, and comes with a licence for ten hardware-accelerated IPSec tunnels. Up to 100 additional IPSec tunnels can also be enabled if licensed.

The device comes with two ISDN BRI-S0 and two ISDN PRI-S2M interfaces. In total it provides 68 ISDN-B channels for different ISDN applications such as ISDN backup, ISDN remote access server or ISDN leased lines.

Using functions flexibly

Only a few functions are required to forward data between two networks. Bintec gateways have features that go far beyond just routing and allow it to be seamlessly integrated into complex IT infrastructures.

As routing protocols, you can use RIP, OSPF or the Multicast routing protocol PIM-SM for example, and the comprehensive multicast support makes the device ideal for use in multimedia and streaming applications.

Even the basic equipment of the bintec R4402 provides a SIP application level gateway (ALG) for the direct connection of IP telephones in the network or for registering with a VoIP provider. The ALG automatically controls the internal firewall making it easier to configure your VoIP solution.

Thanks to the integrated quality of service, you can prioritise VoIP traffic over normal internet traffic, for example, and thereby always ensure sufficient bandwidth for your IP voice connections. Alternatively you can give normal data traffic priority over e-mail traffic.

The DNS proxy function supports the LAN for address implementation and the automated IP configuration of PCs is carried out over an integrated DHCP server.

Remote CAPI is available for the joint use of various ISDN services.

Comprehensive IPSec implementation

The IPSec implementation integrated in bintec R4402 works not only with preshared keys but also with certificates. This allows a public key infrastructure to be created for maximum security. (The Federal Office for Information Security also recommends the use of certificates.)

Furthermore, the bintec IPSec implementation offers support when creating VPN connections with dynamic IP addresses: Even small branch offices can be reached without having to be permanently online. If both VPN nodes only have dynamic IP addresses, confidential information can continue. The exchange of IP addresses is carried out either over dynamic DNS providers or directly over an ISDN connection. The actual dynamic IP address is transferred either free of charge in the ISDN D-channel or, if this is not possible, in the B-channel (at cost).

By using IKE Config mode and the bintec IPSec multi user this offers the opportunity to create and manage IPSec dial-in solutions for multiple clients with minimal expense and IKE X-Auth (extended authentication) allows a connection to be secured with a one time password and thus with the highest level of security.

Load Balancing/Redundancy

The IPsec implementation integrated in bintec R4402 works not only with preshared keys but also with certificates. This allows a public key infrastructure to be created for maximum security. (The German Federal Office for Information Security also recommends the use of certificates.) Furthermore, the bintec IPsec implementation offers support when creating VPN connections with dynamic IP addresses: Even small branch offices can be reached without having to be permanently online. If both VPN nodes only have dynamic IP addresses, confidential information can continue. The exchange of IP addresses is carried out either over dynamic DNS providers or directly over an ISDN connection. The actual dynamic IP address is transferred either free of charge in the ISDN D-channel or, if this is not possible, in the B-channel (at cost). By using IKE Config mode and the bintec IPsec multi user this offers the opportunity to create and manage IPsec dial-in solutions for multiple clients with minimal expense and IKE X-Auth (extended authentication) allows a connection to be secured with a one time password and thus with the highest level of security.

Simple configuration and maintenance

The gateway is configured over the Configuration Interface (FCI), using the integrated configuration wizards for example. The FCI is a web-based graphic user surface that you can use from any PC with an up-to-date Web browser via an HTTP or encrypted HTTPS connection. It also offers the opportunity to manage the devices locally and remotely over other configuration accesses such as Telnet, SSH and ISDN login.

DIME Manager is a free tool for managing bintec and elmeg devices.

DIME Manager is aimed at administrators who manage networks with up to 50 devices. The software simplifies the management and configuration of gateways or access points either individually or in logical groups.

When developing DIME Manager, simple and efficient operation was the primary aim. It allows, for example, software updates to be applied to individual devices or groups of devices simply by drag and drop. DIME Manager recognises and manages new devices in the network using SNMP multicast, in other words independent of their current IP address.

WLAN Controller, HotSpot and adult content filtering

The router also includes all the functionality of the bintec WLAN Controller. The bintec WLAN controller lets you configure and monitor small- and mid-sized WLAN networks with up to 72 access points. No matter whether you need frequency management with automatic channel selection, loadbalancing across several access points, support for virtual LANs, or virtual wireless network administration (multi-SSID) - you have all these advanced features at your fingertips with the WLAN Controller. The software continually monitors the entire wireless network, notifying administrators of any malfunctions or security threats.

The router's integrated HotSpot Gateway together is an ideal complement to the WLAN Controller in combination with a bintec HotSpot license, allowing operators to set up a wireless guest network that requires authentication. This secure separation between the guest network and company network is configured through the WLAN Controller and implemented using virtual wireless networks. An additional highlight is the optional Cobion filter which can be used to prevent children and youth from accessing inappropriate content.

Variants

bintec R4402 - UK (5510000264)	VPN Gateway; 19 inch rack; ISDN 2xBRI 2xPRI; incl. 10 IPSec tunnels (opt. max. 110), certificates, HW encryption; 4+1 Gigabit Eth. switch; UK version.
bintec R4402 (5510000214)	VPN Gateway; 19 inch rack; ISDN 2xBRI 2xPRI; incl. 10 IPSec tunnels (opt. max. 110), certificates, HW encryption; 4+1 Gigabit Eth. switch; german and intern. version.

Features

ISDN	
CAPI	CAPI 2.0 with CAPI user concept (password for CAPI use)
ISDN protocols	Euro-ISDN (Point-to-multipoint/Point-to-point)
ISDN protocols	G.703. (unstructured) and G.704 (n x 64kBps)
ISDN leased lines	Supported leased lines: ISDN BRI: D64S, D64S2, TS02, D64S2Y; ISDN PRI: D2M, LMS64
ISDN auto-configuration	Automatic recognition and configuration of ISDN protocols
B channel protocols	Excellent interoperability with other manufacturers (Raw HDLC, CISCO HDLC, X.75)
X.31 over CAPI	Support for various connection paths: X.31/A for ISDN D-channel, X.31/A+B for ISDN B-channel, X.25 within ISDN B-channel (also leased lines)
Bit rate adaption	V.110 (1,200 up to 38,400 bps), V.120 up to 57,600 kbps (HSCSD) for connection to GSM subscribers

VPN	
PPTP (PAC/PNS)	Point to Point Tunneling Protocol for establishing fo Virtual Privat Networks, inclusive strong encryption methods with 128 Bit (MPPE) up to 168 Bit (DES/3DES, Blowfish)
PPP / PPTP hardware acceleration	Integrated hardware acceleration for PPP/PTPP encryption algorithms DES, 3DES, MPPE
GRE v.0	Generic Routing Encapsulation V.0 according RFC 2784 for common encapsulation
L2TP	Layer 2 tunnelling protocol inclusive PPP user authentication
Number of VPN tunnels	Inclusive 110 active PPTP, L2TP and GRE v.0 tunnels (also in combination possible)
IPSec	Internet Protocol Security establishing of VPN connections
Number of VPN tunnels	Inclusive 10 active VPN tunnels, optional up to 110 IPSec tunnels
IPSec Algorithms	DES (64 Bit), 3DES (192 Bit), AES (128,192,256 Bit), CAST (128 Bit), Blowfish (128-448 Bit), Twofish (256 Bit); MD-5, SHA-1, RipeMD160, Tiger192 Hashes
IPSec hardware acceleration	Integrated hardware acceleration for IPSec encryption algorithms DES, 3DES, AES inclusive hardware acceleration for MD-5, SHA-1 Hash generation
IPSec IKE	IPSec key exchange via preshared keys or certificates
IPSec IKE Config Mode	IKE Config Mode server enables dynamic assignment of IP addresses from the address pool of the company. IKE Config Mode client enables the router, to get assigned dynamically an IP address.
IPSec IKE XAUTH (Client/Server)	Internet Key Exchange protocol Extended Authenticaion client for login to XAUTH server and XAUTH server for logging of XAUTH clients

VPN	
IPSec IKE XAUTH (Client/Server)	Inclusive the forwarding to a RADIUS-OTP (One Time Password) server (supported OTP solutions see www.bintec-elmeg.com).
IPSec NAT-T	Support of NAT-Traversal (Nat-T) for the application at VPN lines with NAT
IPSec IPComp	IPSec IPComp data compression for higher data throughput via LZS
IPSec certificates (PKI)	Support of X.509 multi-level certificates compatible to Microsoft and Open SSL CA server; upload of PKCS#7/8/10/12 files via TFTP, HTTP, LDAP, file upload and manual via FCI
IPSec SCEP	Certificates management via SCEP (Simple Certificate Enrollment Protocol)
IPSec Certificate Revocation Lists (CRL)	Support of remote CRLs on a server via LDAP or local CRLs
IPSec Dead Peer Detection (DPD)	Continuous control of IPSec connection
IPSec dynamic IP via ISDN	Transmission of dynamic IP address in ISDN D or B channel; free-of-charge licence necessary
IPSec dynamic DNS	Enables the registering of dynamic IP addresses by a dynamic DNS provider for establishing a IPSec connection.
IPSec RADIUS	Authentication of IPSec connections at a RADIUS server. Additionally the IPSec peers, which were configured on a RADIUS server, can be loaded into the gateway (RADIUS dialout).
IPSec Multi User	Enables the Dial-in of several IPSec clients via a single IPSec peer configuration entry
IPSec QoS	The possibility to operate Quality of Service (traffic shaping) inside of an IPSec tunnel
IPSec NAT	By activating of NAT on an IPSec connection it is possible, to implement several remote locations with identical local IP address networks in different IP nets for the VPN connection
IPSec throughput (1400)	86 Mbps with 1400 Byte packets with AES 256 / AES 128 / 3 DES encryption
IPSec throughput (256)	19 Mbps with 1400 Byte packets with AES 256 / AES 128 / 3 DES encryption

Security	
NAT/PAT	Symmetric Network and Port Address Translation (NAT/PAT) with randomly generated ports inclusive Multi NAT (1:1 translation of whole networks)
Policy based NAT/PAT	Network and Port Address Translation via different criteria like IP protocols, source/destination IP Address, source/destination port
Policy based NAT/PAT	For incoming and outgoing connections and for each interface variable configurable
Content Filtering	Optional ISS/Cobion Content filter (30 day test license inclusive)
Stateful Inspection Firewall	Packet filtering depending on the direction with controlling and interpretation of each single connection status
Packet Filter	Filtering of IP packets according to different criteria like IP protocols, source/destination IP address, source/destination port, TOS/DSCP, layer 2 priority for each interface variable configurable

Routing	
Policy based Routing	Extended routing (Policy Based Routing) depending of different criteria like IP protocols (Layer4), source/destination IP address, source/destination port, TOS/DSCP, source/destination interface and destination interface status

Routing	
Multicast IGMP	Support of Internet Group Management Protocol (IGMP v1, v2, v3) for the simultaneous distribution of IP packets to several stations
Multicast IGMP Proxy	For easy forwarding of multicast packets via dedicated interfaces
Multicast Routing Protocol PIM SM	Protocol Independent Multicast (PIM) distributes information via a central Rendezvous Point Server. PIM Modus Sparse Mode (SM) forwards only packets to groups which have been requested
Multicast inside IPsec tunnel	Enables the transmission of multicast packets via an IPsec tunnel
RIP	Support of RIPv1 and RIPv2, separated configurable for each interface
Extended RIP	Triggerd RIP updates according RFC 2091 and 2453, Poisoned Reverse for a better distribution of the routes; furthermore the possibility to define RIP filters for each interface.
OSPF	Support of the dynamic routing protocol OSPF
Routing throughput (1518)	199 Mbps with 1518 Byte packets
Routing throughput (256)	198 Mbps with 256 Byte packets

Protocols / Encapsulations	
PPP/MLPPP	Support of Point to Point Protocol (PPP) for establishing of standard PPP connections, inclusive the Multilink extension MLPPP for the bundeling of several connections
PPPoE (Server/Client)	Point-to-Point Protocol over Ethernet (Client and Server) for establishing of PPP connections via Ethernet/DSL (RFC 2516)
MLPPPoE (Server/Client)	Multilink extension MLPPPoE for bundeling several PPPoE connections (only if both sides support MLPPPoE)
DNS	DNS client, DNS server, DNS relay and DNS proxy
DYN DNS	Enables the registering of dynamic assigned IP addresses at adynamic DNS provider, e.g. for establishing of VPN connections
DNS Forwarding	Enables the forwarding of DNS requests of free configurable domains to assigned DNS server.
DHCP	DHCP Client, Server, Proxy and Relay for siplified TCP/IP configuration
Packet size controlling	Adaption of PMTU or automatic packet size controlling via fragmentation
X.25 Enhanced	Optional: X.25 over ISDN, XOT, X.25 to TCP Gateway, X.25 PAD, TP0 Bridge

Quality of Service (QoS)	
Policy based Traffic Shapping	Dynamic bandwidth management via IP traffic shaping
Bandwidth reservation	Dynamic reservation of bandwidth, allocation of guaranteed and maximum bandwidths
DiffServ	Priority Queuing of packets on the basis of the DiffServ/TOS field
Layer2/3 tagging	Conversion of 802.1p layer 2 prioritisation information to layer 3 diffserv attributes
TCP Download Rate Control	For reservation of bandwidth for VoIP connections

Redundancy / Loadbalancing

BRRP	Bintec Router Redundancy Protocol for backup of several passive or active devices with free selectable priority
BoD	Bandwidth on Demand: dynamic bandwidth to suit data traffic load
Load Balancing	Static and dynamic load balancing to several WAN connections on IP layer
VPN backup	Simple VPN backup via different media. Additionally enables the bintec elmeg interface based VPN concept the application of routing protocols for VPN connections.

Layer 2 Functionality

Bridging	Support of layer 2 bridging with the possibility of separation of network segment via the configuration of bridge groups
VLAN	Support of up to 32 VLAN (Virtual LAN) for segmentation of the network in independent virtual segments (workgroups)
Proxy ARP	Enables the router to answer ARP requests for hosts, which are accessible via the router. That enables the remote clients to use an IP address from the local net.

Logging / Monitoring / Reporting

Internal system logging	Syslog storage in RAM, display via web-based configuration user interface (http/https), filter for subsystem, level, message
External system logging	Syslog, several syslog server with different syslog level configurable
E-Mail alert	Automatic E-Mail alert by definable events
SNMP traps	SNMP traps (v1, v2, v3) configurable
Activity Monitor	Sending of information to a PC on which Brickware is installed
IPSec monitoring	Display of IPSec tunnel and IPSec statistic; output via web-based configuration user interface (http/https)
Interfaces monitoring	Statistic information of all physical and logical interfaces (ETH0, ETH1, SSIDx, ...), output via web-based configuration user interface (http/https)
ISDN monitoring	Display of active and past ISDN connections; output via web-based configuration user interface (http/https)
IP accounting	Detailed IP accounting, source, destination, port, interface and packet/bytes counter, transmission also via syslog protocol to syslog server
ISDN accounting	Detailed ongoing recording of ISDN connection parameter like calling number and charging information, transmission also via syslog protocol to syslog server
RADIUS accounting	RADIUS accounting for PPP, PPTP, PPPoE and ISDN dialup connections
Keep Alive Monitoring	Control of hosts/connections via ICMP polling
Tracing	Detailed traces can be done for different protocols e.g. ISDN, PPPoE, ... generation local on the device and remote via DIME Manager
Tracing	Traces can be stored in PCAP format, so that import to different open source trace tools (e.g. Wireshark) is possible.

Administration / Management

RADIUS	Central check of access authorization at one or several RADIUS server, RADIUS (PPP, IPSec inclusive X-Auth and login authentication)
RADIUS dialout	On a RADIUS server configured PPP und IPSec connection can be loaded into the gateway (RADIUS dialout).
TACACS+	Support of TACACS+ server for login authentication and for shell comando authorization
Time synchronization	The device system time can be obtained via ISDN and from a SNTP server (up to 3 time server configurable). The obtained time can also be transmitted per SNTP to SNTP clients.
Automatic Time Settings	Time zone profiles are configurable. That enables an automatic change from summer to winter time.
Supported management systems	DIME Manager, XAdmin
Configurable scheduler	Configuring of time and event controlled tasks, e.g. reboot device, activate/deactivate interface, activate/deactivate WLAN, trigger SW update and configuration backup
Configuration Interface (FCI)	Integrated web server for web-based configuration via HTTP or HTTPS (supporting self created certificates). This user interface is by most of bintec elmeg GmbH products identical.
Software update	Software updates are free of charge; update via local files, HTTP, TFTP or via direct access to the bintec elmeg web server
Remote maintenance	Remote maintenance via telnet, SSL, SSH, HTTP, HTTPS and SNMP (V1,V2,V3)
Configuration via serial interface	Serial configuration interface is available
ISDN remote maintenance	Remote maintenance via ISDN dial-in with checking of the calling number. The ISDN remote maintenance connection between two bintec elmeg devices can be encrypted.
ISDN remote maintenance	A transparent mode enables transmissions of configurations and software updates respectively
GSM remote maintenance	Remote maintenance via GSM login (external modem and cable required)
Device discovery function	Device discovery via SNMP multicast.
On The Fly configuration	No reboot after reconfiguration required
SNMP	SNMP (v1, v2, v3), USM model, VACM views, SNMP traps (v1, v2, v3) configurable, SNMP IP access list configurable
SNMP configuration	Complete management with MIB-II, MIB 802.11, Enterprise MIB
Configuration export and import	Load and save configurations, optional encrypted; optional automatic control via scheduler
SSH login	Supports SSH V1.5 and SSH V2.0 for secure connections of terminal applications
HP OpenView	Integration into Network Node Manager
XAdmin	Support of XAdmin roll out and configuration managemant tool for larger router installations (IP+ISDN+GSM)

Interfaces

Ethernet	5 x 10/100/1000 Mbps Ethernet Twisted Pair, autosensing, Auto MDI/MDI-X, up to 4 ports can be switches as additional WAN ports incl. load balancing, all Ethernet ports can be configured as LAN or WAN.
----------	--

Interfaces

Serial console	Serial console interface / COM port (mini USB): optional, connection of an analogue / GPRS modem is possible (supported modems: see www.bintec-elmeg.com)
ISDN Basic Rate (BRI)	2 x BRI (NT/TE), each 2 B channel
ISDN Primary Rate (PRI)	2 x PRI (NT/TE), each 30 B channel

Hardware

19 inch	Mountable in 19 inch rack, incl. 19 inch rack mount kit
Realtime clock	System time persists even at power failure for some hours.
Environment	Temperature range: Operational 0°C to 40°C; storage -10°C to 70°C; Max. rel. humidity 10 - 95% (non condensing)
Power supply	Integrated wide range power supply 110-240V, with energy efficient swiching controller
Power consumption	Max. 24 Watt, typ. 15 Watt
Housing	19 inch 1 high unit metal case, screw-on 19 inch mounting-angle, LEDs and network connectors at front side
Dimension	Ca. 485.6 mm x 220 mm x 45 mm (W x H x D)
Weight	Ca. 2600g
Fan	Fanless design therefor high MTBF
Reset button	Restart or reset to factory state possible
Standards and certifications	R&TTE directive 1999/5/EG; EN 55022; EN 55024 + EN 55024/A1; EN61000-3-2; EN 61000-3-3; EN 61000-4-4; EN 60950-1; EN 300 328

Content of Delivery

Manual	Quick Installation Guide in German and English
DVD	DVD with system software, management software and documentation
Ethernet cable	1 Ethernet cable, 3m
Network cable	Power cable
Serial cable	Serial cable (mini USB - DSUB 9 female)
ISDN (BRI/S0) cable	ISDN (BRI/S0) cable, 3m
ISDN (PRI/S2M) cable	ISDN (PRI/S2M) cable, 3m

Service

Warranty	2 year manufacturer warranty inclusive advanced replacement
Software Update	Free-of-charge software updates for system software (BOSS) and management software (DIME Manager)

Options

Options

MPPC and Stac compression	Free-of-charge license for Stac and MPPC compression; registration at www.bintec-elmeg.com required
IP address ISDN B/D channel license	Free of charge license for IP address transmission in ISDN D or B channel for IPsec connections; registering under www.bintec-elmeg.com required.

Accessoires

WLAN Controller

License WLAN Contr. 6AP (5500000943)	WLAN Controller license for 6 Access Points (APs) or for the extension with 6 APs for the products: Rxxx2 and RXL12x00.
---	---

Software Licenses

Rxx02/RTxx02/RXL12xxx-IPSEC25 (5500000781)	Additional 25 IPsec tunnel license for Rxx02, RTxx02 and RXL12xxx series
Rxx02/RTxx02-X25 (5500000783)	License for X.25/XOT/X25toTCP for Rxx02 and RTxx02 series
Cobion Content Filter Small (80551)	Cobion content filter for RSxxx, Rxx02, RTxx02 series; R230a(w), R232b(w), TR200, R1200(w/wu), R3000(w), R3400, R3800, R232aw, RV-Series; list price for one year

Pick-up Service / Warranty Extension

Service Package 'large' (5500000811)	Warranty extension of 3 years to a total of 5 years, including advanced replacement for bintec elmeg products of the category 'large'. Please find a detailed description as well as an overview of the categories on www.bintec-elmeg.com/servicepackages .
---	--

Product Services

HotSpotHosting 1yr 1 location (5510000198)	HotSpot solution hosting fee for 1 year and 1 location
HotSpotHosting 2yr 1 location (5500000861)	HotSpot solution hosting fee for 2 year and 1 location
Additional HotSpot location (5510000199)	Additional location for the HotSpot solution (551000198, 5500000861) valid for one year

Add-ons

bintec 4GE-LE (5530000119)	LTE (4G)/UMTS (3G) extension device for router; 1x Gbit Eth; Simcard slot; Wallmounting; PoE Injector inclusive
-----------------------------------	---

Cables

Console Cable MiniUSB to DSUB9 (5500000717)	Serial console cable for RS23x, RT, Rxx02 Series and hybrid (Mini USB to D-SUB 9)
--	---

Cables

ISDN PRI/S2M cable (01466)

Cable for ISDN PRI/S2M interface