

# ComAnt<sup>®</sup> Communications Antennas




## FREQUENCY INDEPENDENT DATA

Description: cellular yagi  
 Frequency: 880-960/1710-2170 MHz  
 Impedance: 50 ohm  
 Gain: 6/8 dBi  
 Polarization: vertical/horizontal  
 Connector: N-female/TNC-female  
 VSWR: < 1.5  
 Radome: UV resistant ABS, RAL 7012, PU foam filling  
 Radiator: copper

Passive elements: coated aluminium  
 Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self locking nuts


Lightning protection: DC-short circuited  
 Temperature: -40° - +80°C  
 IP: 67

RADIATION PATTERN 920 MHz




— E dB — H dB

RADIATION PATTERN 1940 MHz



— E dB — H dB

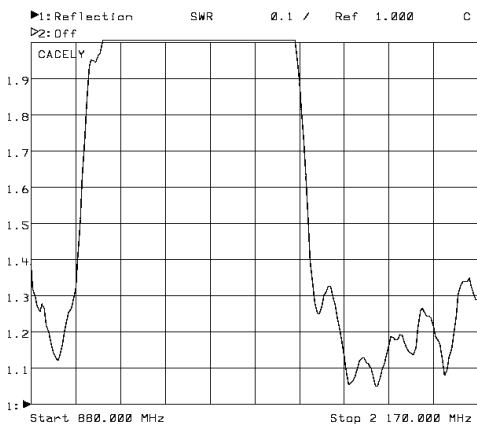

**CompleTech**  
 ComAnt<sup>®</sup>-antennas by CompleTech, Finland

**CACELY**  
**CELLULAR YAGI**